
AutoMax

Greater Flexibility. Less Space.

WRAP AND BASKET PACKAGING SYSTEM



A high speed, compact system capable of producing both wraps and baskets in a variety of styles. Developed from a combination of two proven GPI product lines, the MMX5 Wrap System and the AF15HS Basket System.

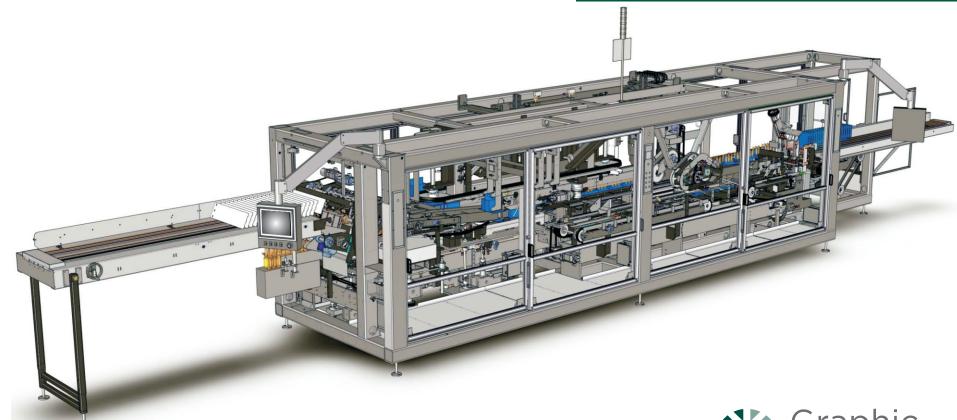

Auto**MAX**™ Specifications

Machine Footprint (RH shown, LH available) 33'-0" (10m) Installed Length Wrap Magazine Ootional Basket Decaser

Integrated Turn/Divide/Reject Options









Turn, 1,2,3 Way Divide







Reject, 2 Way Divide

Wrap Styles 4,6,8,10,12 Pack (1x Optional)







Neck Through



Bottom Tab Locker



Ad Panels



Handle Wrap

Basket Styles 4 and 6 Pack



Fully Enclosed



Radius Strap Corner Style



Full Protection



Neck Through



Neck Through No Handle

Key Features

Flexibility

Ability to package a wide range of glass and PET bottle sizes and shapes in both wrap and basket packages.

High Speed Packaging

Optimized full or split pitch design provides a wide range of formats and allows speeds up to 300 packs per minute

	Pitch	Line	Surge
Baskets	10"	220ppm	250ppm
Wraps	10"	250ppm	300ppm
	20"	100ppm	120ppm

Quick and Simple Changeovers

The AutoMAX* features no-tool changeovers for product and carton changes and between wraps and baskets.

Enhanced Functions

- Integrated turner divider function
- High capacity magazines
- Repitching system to achieve high pack throughput at reduced linear speeds

The new Wrap and Basket system from Graphic Packaging combines two proven product lines into one compact solution to provide the speeds and flexibility our customers require.



GPI IQ Tablet

- Portable on-demand technical documentation
- Operator and maintenance manuals
- Parts manual with 3-D PDF viewer
- Changeover checklist with video help files

Machine Options

- 1x wrap formats (1x2,3,4,5,6)
- Lock inspection with pack reject
- · Automatic Basket Decaser

Product Size Range



Minimum Product
Height - 6" (152mm)
Maximum Product
Height - 11" (280mm)
Minimum Product
Diameter - 2" (51mm)
Maximum Product
Diameter - 3.25" (82mm)

Electrical 400/480 VAC, 60A, 50/60 Hz

Air Requirements 80psi - 30CFM, 6 bar - 51m3/H

LubricationLube free bearings
Automatic oil to chains



INTERNATIONAL. INC.

Graphic Packaging International, Inc. 1500 Riveredge Parkway Atlanta, GA 30328

Phone (770)240-7200 Fax (770)937-9107 www.graphicpkg.com